

SIL-AIR 50 TC



 **50 l/min - 1.77 CFM**

 **8 bar - 116 psi**








Modello con telaio in tubolare

Model with tubular frame



Modèle avec structure tubulaire


Modelle mit Rohrrahmen

Modelo con chasis tubular


						
Volt/Hz	l/min (CFM) *	l (Gal.)	Watt	dB/1m	Kg (Lbs)	Kg (Lbs)
230/50	37 (1.3)	3.5 (0.92)	340	40	21 (46)	22 (48)
115/60	44 (1.55)		400			

* = @ 5 bar (72.5 PSI)

	A mm	B mm	C mm
	280	350	340
	300	380	370

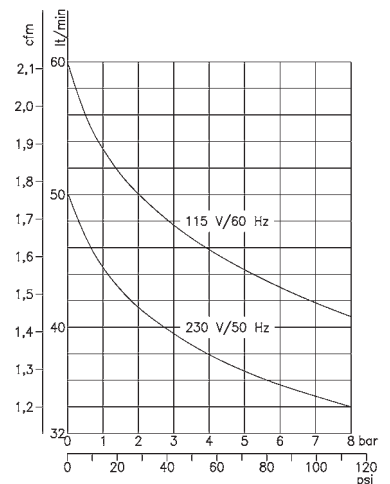

OPZIONI / OPTIONALS / OPTIONS / SONDERZUBEHÖR / OPCIONES

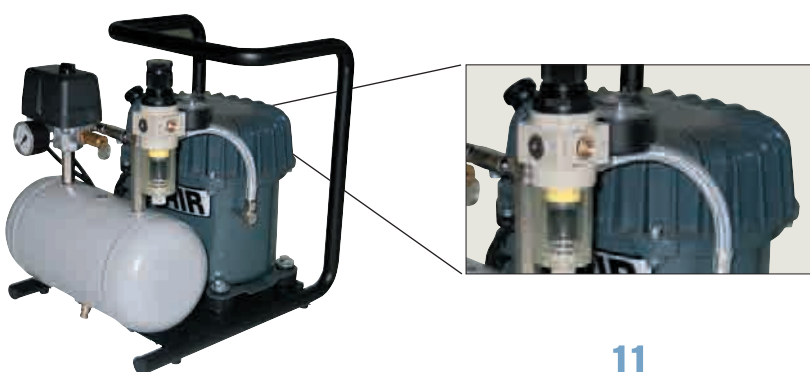

SIL-AIR 50 TC AL

Motore con coperchio alettato

Motor with cooling head

Moteur avec couvercle à ailettes

Motor mit Kühlrippen

Motor con cabeza aletada



Silent-Air-Technology