

SIL-AIR 50/6



50 l/min - 1.77 CFM


8 bar - 116 psi

Modello portatile con serbatoio verticale 6 litri
Portable model with vertical 6-l air receiver
Modèle portatif avec réservoir vertical 6 litres
Tragbares Modell mit vertikalem 6-l-Druckbehälter
Modelo portátil con depósito vertical de 6 litros


Volt/Hz	l/min (CFM)	l (Gal.)	Watt	dBA	Kg (Lbs)	Kg (Lbs)
230/50	37 (1.3)	6 (1.58)	340	40	20 (44)	21 (46)
115/60	44 (1.55)		400			

* = @ 5 bar (72.5 PSI)

	A mm	B mm	C mm
	300	300	440
	340	340	500

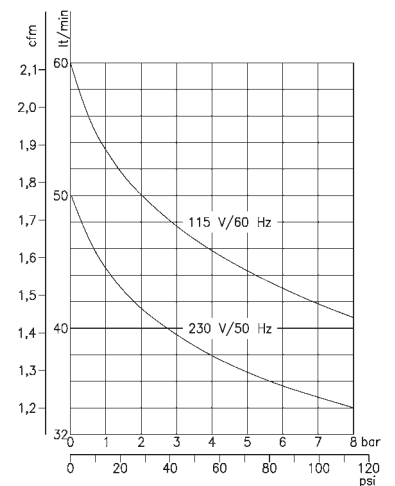

OPZIONI / OPTIONALS / OPTIONS / SONDERZUBEHÖR / OPCIONES

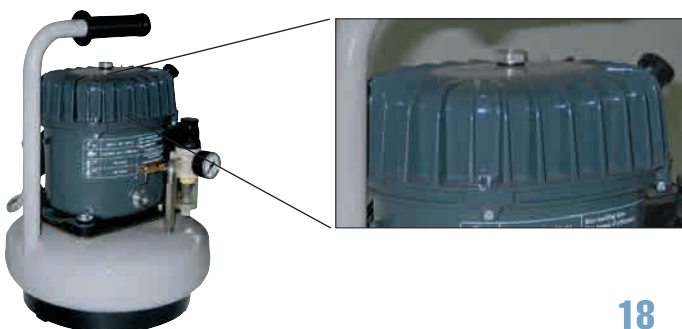

SIL-AIR 50/6 AL

Motore con coperchio alettato
Motor with cooling head
Moteur avec couvercle à ailettes
Motor mit Kühlrippen
Motor con cabeza aletada

