

SIL-AIR 50/15



50 l/min - 1.77 CFM


8 bar - 116 psi

Modello portatile con serbatoio verticale 15 litri
 Portable model with vertical 15-l air receiver
 Modèle portatif avec réservoir vertical 15 litres
 Tragbares Modell mit vertikalem 15-l-Druckbehälter
 Modelo portátil con depósito vertical de 15 litros


Volt/Hz	l/min (CFM) *	l (Gal.)	Watt	dBA	Kg (Lbs)	Kg (Lbs)
230/50	37 (1.3)	15 (3.96)	340	40	26 (57)	27 (59)
115/60	44 (1.55)		400			

* = @ 5 bar (72.5 PSI)

	A mm	B mm	C mm
	350	350	550
	370	370	600

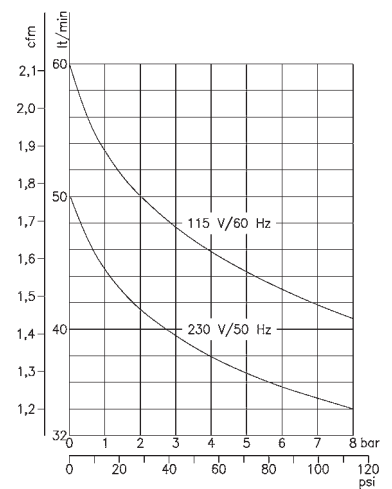

OPZIONI / OPTIONALS / OPTIONS / SONDERZUBEHÖR / OPCIONES

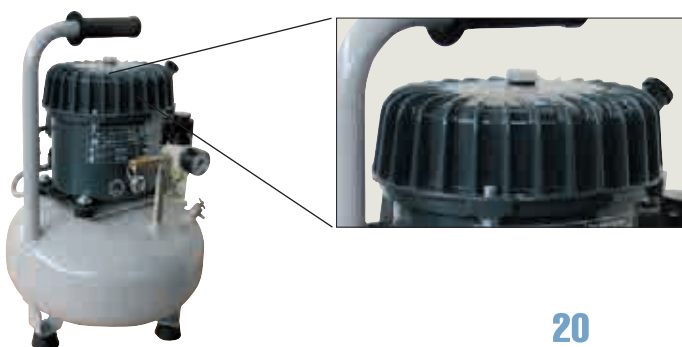

SIL-AIR 50/15 AL

Motore con coperchio alettato
 Motor with cooling head
 Moteur avec couvercle à ailettes
 Motor mit Kühlrippen
 Motor con cabeza aletada

