

SIL-AIR 50/24AL



50 l/min - 1.77 CFM

8 bar - 116 psi

Modello portatile con serbatoio verticale 24 litri

Portable model with vertical 24-l air receiver

Modèle portatif avec réservoir vertical 24 litres


Tragbares Modell mit vertikalem 24-l-Druckbehälter

Modelo portátil con depósito vertical de 24 litros


Volt/Hz	l/min (CFM) *	l (Gal.)	Watt	dBA	Kg (Lbs)	Kg (Lbs)
230/50	37 (1.3)	24 (6.34)	340	40	27 (60)	29 (64)
115/60	44 (1.55)		400			

* = @ 5 bar (72.5 PSI)

	A mm	B mm	C mm
	400	400	600
	420	420	640

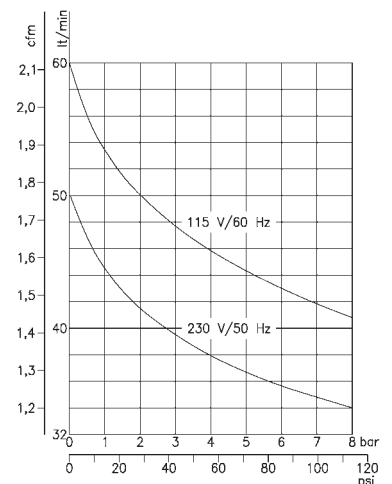

OPZIONI / OPTIONALS / OPTIONS / SONDERZUBEHÖR / OPCIONES

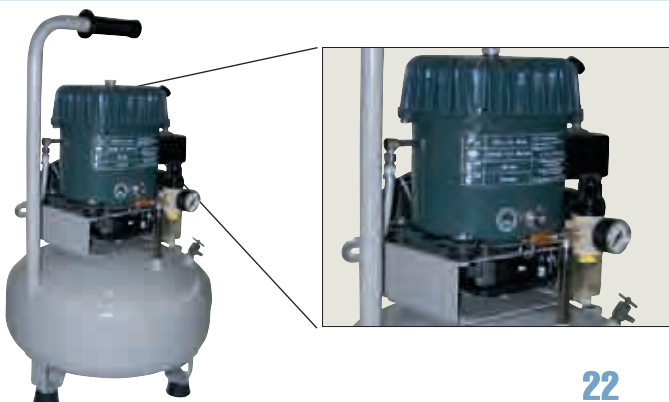

SIL-AIR 50/24 V AL

Motore con coperchio alettato e ventola

Motor with cooling head and fan

Moteur avec couvercle à ailettes et ventilateur

Motor mit Kühlrippen und zusätzlichem Kühlventilator

Motor con cabeza aletada y con ventilador de

enfriamiento



Silent-Air-Technology