

SIL-AIR 100/50

 100 l/min - 3.53 CFM

 8 bar - 116 psi

Modello carrellato con 2 motori
Trolley-mounted model with two motors

Modèle sur chariot avec 2 moteurs

Fahrbares Modell mit 2 Verdichtern

Modelo con ruedas y 2 motores

SIL-AIR 100/50 V

Modello con ventole di raffreddamento

Model with cooling fans








Modèle avec ventilateurs de refroidissement

Modell mit Kühlventilatoren



Modelo con ventiladores de enfriamiento

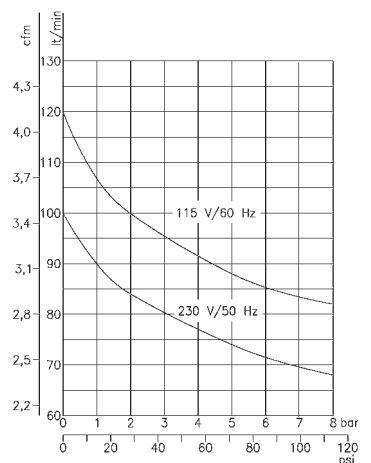


Silent-Air-Technology

						
Volt/Hz	l/min (CFM) *	l (Gal.)	Watt	dBA	Kg (Lbs)	Kg (Lbs)
230/50	74 (2.6)	50 (13.2)	680	42	60 (132)	67 (148)
115/60	88 (3.1)		400			

* = @ 5 bar (72.5 PSI)

	A mm	B mm	C mm
	400	860	750
	500	900	800



OPZIONI / OPTIONALS / OPTIONS / SONDERZUBEHÖR / OPCIONES



SIL-AIR 100/50 AL

Motori con coperchi alettati

Motors with cooling heads

Moteurs avec couvercles à ailettes

Motoren mit Kühlrippen

Motores con cabezas aletadas