

SIL-AIR 150/50

 **150 l/min - 5.30 CFM**

 **8 bar - 116 psi**

Modello carrellato con 3 motori
Trolley-mounted model with 3 motors

Modèle sur chariot avec 3 moteurs

Fahrbares Modell mit 3 Verdichtern

Modelo con ruedas y 3 motores

SIL-AIR 150/50 V

Modello con ventole di raffreddamento








Model with cooling fans

Modèle avec ventilateurs de refroidissement



Modell mit Kühlventilatoren


Modelo con ventiladores de enfriamiento




						
Volt/Hz	l/min (CFM) *	l (Gal.)	Watt	dBA	Kg (Lbs)	Kg (Lbs)
230/50 115/60	111 (3.9) 132 (4.65)	50 (13.2)	1020 1200	43	75 (165)	83 (183)

* = @ 5 bar (72.5 PSI)

	A mm	B mm	C mm
	400	860	750
	500	900	800

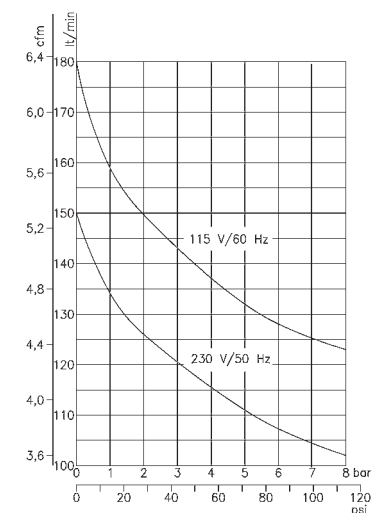

OPZIONI / OPTIONALS / OPTIONS / SONDERZUBEHÖR / OPCIONES

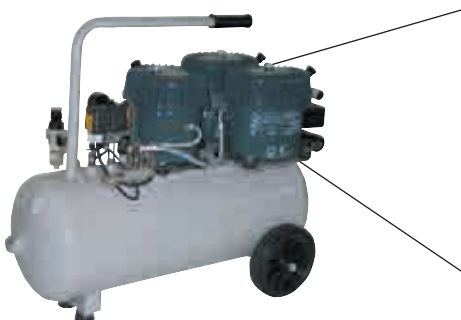

SIL-AIR 150/50 AL

Motori con coperchi alettati

Motors with cooling heads

Moteurs avec couvercles à ailettes

Motoren mit Kühlrippen

Motores con cabezas aletadas